

## TECHNICAL SUBMISSION

### Aerotop L65 – Air to Water Heat Pump

#### General Description:

The Aerotop L65 Air to Water heat pump is one of a range of five units that provide heat outputs @ A-7 W35, ranging from 39kW to 66kW. The COP (EN14511:2018) at this condition ranges between 3.17 and 3.33 for all units. Multiple units can be installed with integral cascade control. The maximum number of units that can be controlled in a single cascade installation is sixteen. Elco Heating Solutions can provide common primary flow and return manifolds for up-to four heat pumps in series. Installations of from four to sixteen can be installed in parallel banks of four to accommodate this feature.

The Aerotop L 65 is supplied with modulating compressors and evaporator fans. This feature allows the units to accurately match the design loads and limit start/stop cycles. All models are reversible to provide the option of cooling during the summer months and incorporate integral defrost control. The units are designed for external installation.

The heat pump is supplied in one piece with a fitted robust and stylish outer casing fabricated from steel, with zinc-magnesium coating. The final finish is polyester powder coat in RAL 9001. Each heat pump is supplied with an integral primary circulation pump on the system side of the condenser, an over-pressure relief valve, flow-proving switch, air vent and electric element. The case dimensions are compact and this ensures that the appliance takes minimal floor space. All units are supplied with anti-vibration mounts to limit transfer to the structure and a filter for installation in the primary return connection.

The heat pump is supplied with an integral control panel, that not only manages the operation of the unit but in addition, if required, can provide time and temperature control for a heating circuit, a domestic hot water circuit and a cooling circuit. The units can optionally be controlled via volt-free switching contacts and can accommodate Modbus communication for remote inputs and outputs to a building management system. The unit includes integral fault and alarm indications. Information is provided by specific fault codes and means less time is required fault finding.

The refrigerant circuit is hermetically sealed at manufacture.

The Aerotop L65 heat pump is a Keymark listed appliance.



#### INNOVATIVE AND SUSTAINABLE

Ambient air is used as the energy source  
Reversible heat pump using R32 refrigerant  
Can provide both heating and cooling

**Warranty:** To activate warranty, you must **register your product** within six months of the purchase date. This can be completed by telephone or email.

Tele: **0333 240 8777 option One** - New product registrations.

e-mail: **customer.service.uk@ariston.com**

The following information must be provided:

Appliance serial number

Purchase date

Installation date

Site contact name, email address and telephone number


Product installation address.

On the condition that the product has been installed to manufacturers instructions and the warranty terms and conditions have not been compromised, the **standard warranty term** for the **AERTOP L Heat Pumps** is **two years** from date of purchase.

All products that are **not registered**, will have a **one year** warranty period and this will cover **material and manufacture fault**, subject to the product being installed to manufacturers instructions.

## Technical Data:

Aerotop Heat Pump	L65	
<b>Compressor</b>		
Compressor type	Scroll Inverter	-
Number of compressors	2	-
Oil charge	6	litres
Refrigerant type	R32	-
Refrigerant charge	21.0	kg
No of circuits	1	-
<b>Primary Water Exchanger</b>		
Type	Brazed plate heat exchanger	-
Water content	7.8	litres
<b>Evaporator Fans</b>		
Fan type	Variable speed Brushless DC motor	-
Number of fans	3	-
Standard air flow	37199	m <sup>3</sup> /h
Installed unit power	0.9	kW
<b>Primary Water Circuit</b>		
Maximum pressure	10	Bar
Minimum system water volume Heating	620	litres
Minimum system water volume Cooling	200	litres
Heat pump water content	8.0	litres
Minimum flow rate	2.9	litres/sec
Nominal flow rate 5°C ΔT @ output A7 W50	3.8	litres/sec
Maximum flow rate	6.4	litres/sec
<b>Electrical Data</b>		
Power Supply	400/3/50+N	V/P/Hz
Maximum full load current	59.7	Amps
Maximum full load power	40.1	kW
Maximum start current	60.2	Amps
<b>Performance (EN14511:2018)</b>		
<b>Heating</b>		
Operating condition A-7 W35 – COP – SCOP (W35)	55.2 – 2.8 – 4.08	kW – COP – SCOP
Operating condition A2 W35 – COP – SCOP (W35)	70.7 – 3.55 – 4.08	kW – COP – SCOP
Power consumption (EN14511:2018)	23.8	kW
Operating condition A-4 W50 – COP (UK Specific)	61.5 – 2.3	kW – COP
<b>Cooling</b>		
Operating condition A35 W18 – EER - SEER	98.2 – 4.15 – 4.64	kW – EER - SEER
Power consumption (EN14511:2018)	22.9	kW
<b>General</b>		
Operating weight	780	kg
Sound power – standard-Silent – Super Silent	81 – 76 - 71	dB(A)

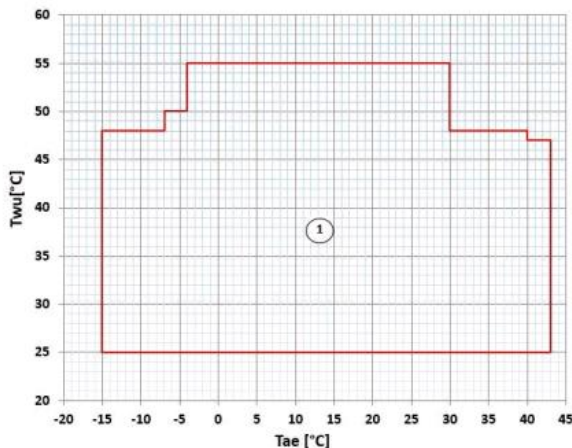


### Operating Range – Heating

1. – Normal operating range

Twu – Primary flow temperature

Tae – Ambient air temperature

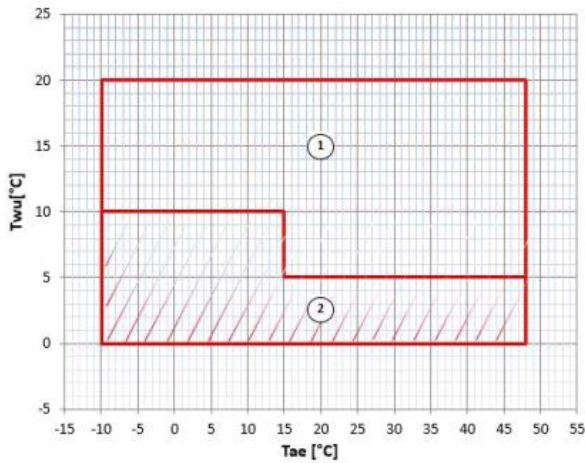


### Operating Range – Cooling

1. – Normal operating range
2. – Operating range where the use of ethylene glycol is mandatory.

Twu – Primary flow temperature

Tae – Ambient air temperature

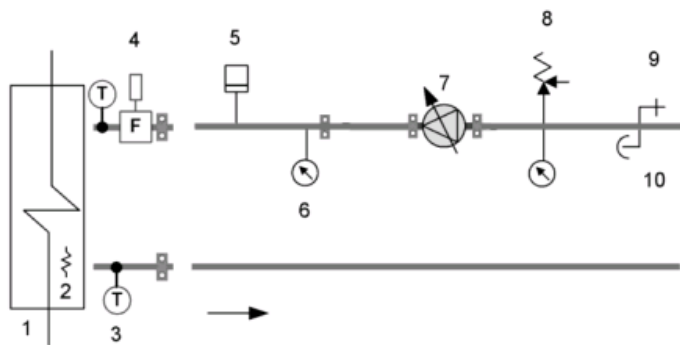


### Heat Pump – Integral Components


1. Condenser/Evaporator – Plate heat Exchanger
2. Element for antifreeze protection
3. Temperature sensor
4. Flow proving switch
5. Over-pressure safety switch
6. Pressure gauge
7. Primary pump – adjustable frequency drive
8. Pressure relief valve
9. Discharge
10. Vent

**Note:** A primary system water filter is supplied as a separate component and this should be installed in the primary return connection outside the appliance casing. The primary pipe-work should be connected to the heat pump using flexible connections (not supplied). This will isolate potential transmission of noise and eliminate stress transmission.

### Dimension and Clearances


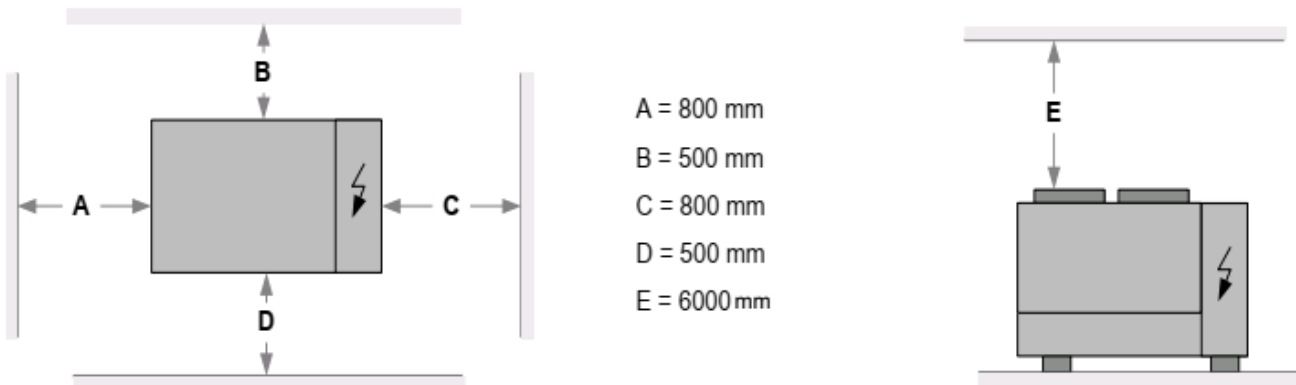


**Do not smoke or use open flames within this area**

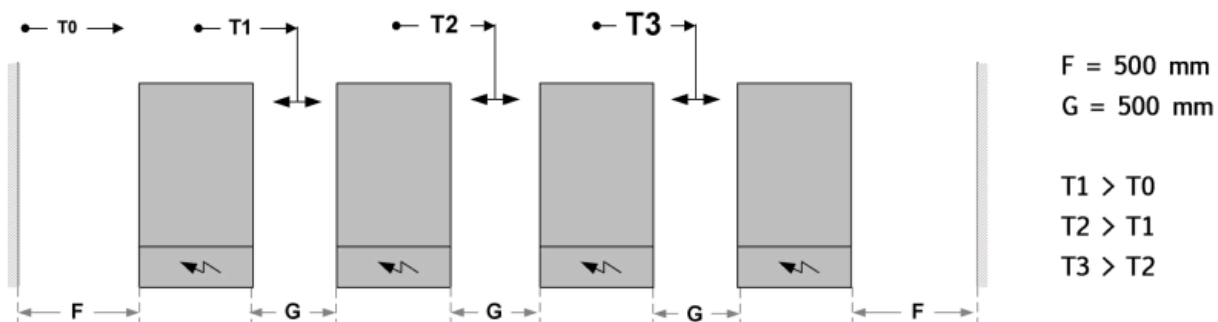


Elco Heating Solutions Limited [www.elco.co.uk](http://www.elco.co.uk)

3 Juniper West, Fenton Way, Southfields Business Park, Basildon SS15 6SJ 01268 546700

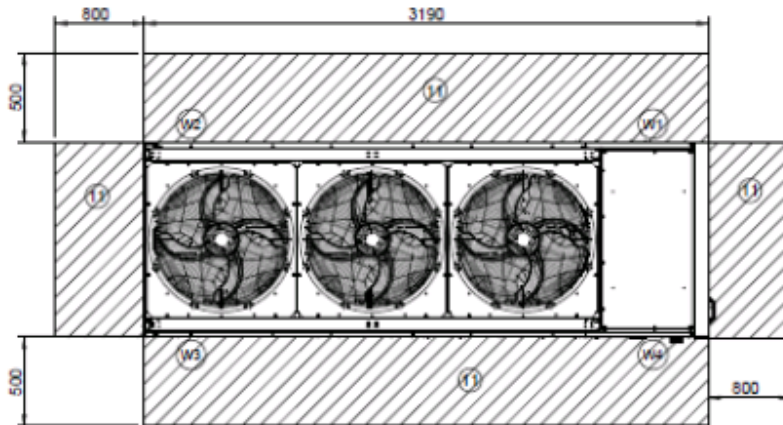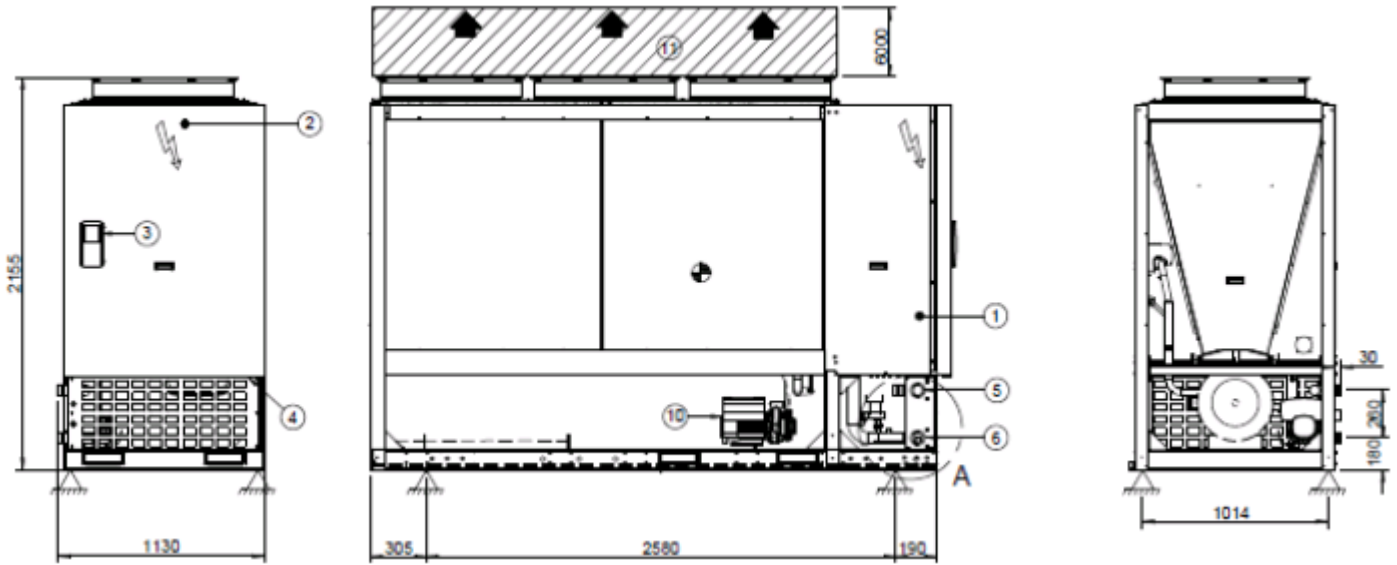

1. Compressor compartment
2. Electric panel
3. Control keypad
4. Power input
5. Primary Inlet (return) – 2" Victaulic to 2" BSP
6. Primary outlet (flow) – 2" Victaulic to 2" BSP
10. Primary pump
11. Clearance required



DETAIL A

The connections at the heat pump are listed as Victaulic but threaded couplings are supplied with each heat pump